

SPIR STAR needle valves are made to the highest quality standards and thus achieve high safety and a long service life even when used in difficult operating conditions. The valves can be used with both gaseous and liquid media and can be opened and/or closed in 4 ½ turns.

In this connection, we would like to emphasize that SPIR STAR AG can also offer quick-opening needle valves for which a mere 1 ¾ turns are needed for opening and/or closing. In addition, all SPIR STAR needle valves allow flow in all directions.

Their innovative design reduces vibrations, which eliminates the necessity of an external clamp to fasten the stem. The valves are also provided with relief holes.

The marking on the valves allows them to be traced at any time. In addition, the SPIR STAR needle valves are supplied including collar + gland nut.

Besides hand-operated needle valves SPIR STAR AG also offers pneumatically operated needle valves.

## Technical data:

Thread Types:	High-Pressure, Medium-Pressure and NPT
Valve Types:	2-Way Straight Valves, 2-Way Angle Valves, 3-Way Valves (Two inlets under pressure / one inlet under pressure), 3-Way/2-Stem Valves Valves with replaceable seat
Material:	Body: 316 Stainless Steel Stem: 17-4PH Sealing: Glas filled Teflon
Max. Working Pressure:	4.140 bar // 60.000 psi
Temperature:	NPT : -18°C to +204°C HP/MP: -17°C to +315°C

## Specials:


- extreme temperatures
- ultra high pressure valves up to 100.000 psi
- special materials
- pneumatic valves



# 2-Way-Straight-Needle Valve



High-Pressure

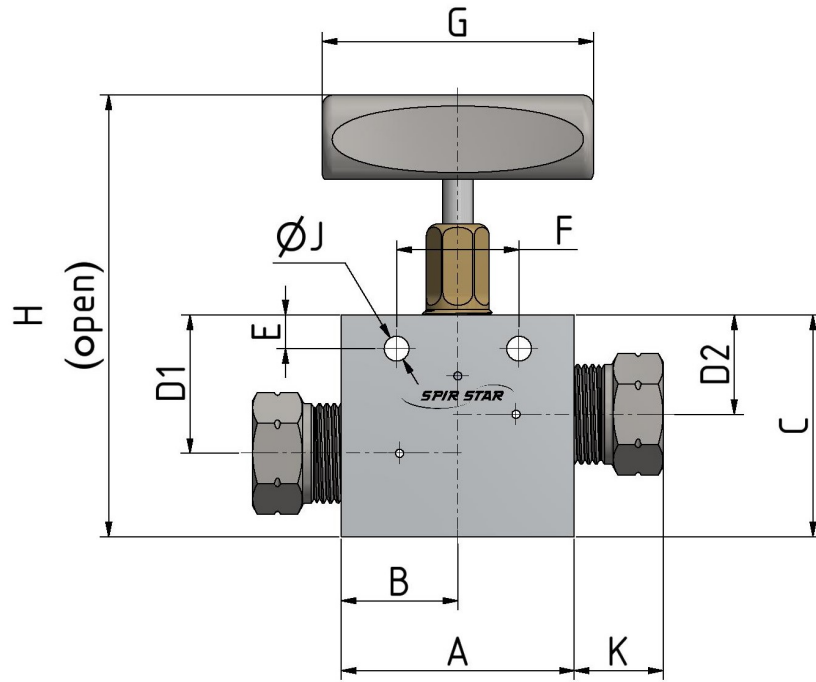

Part Number	Thread Description	Tube Thread	Screw-in Thread	Orifice		Repair Kit	Suitable Tubing
				mm	inch		
<b>2.070 bar / 30.000 psi</b>							
SS-NVHF4-30K	HF4	1/4"x28UNF LH	9/16"x18UNF	2,362	0,093	RK-NV-30K	TU-HP4-60K
SS-NVHF6-30K	HF6	3/8"x24UNF LH	3/4"-16UNF	3,175	0,125	RK-NV-30K	TU-HP6-60K
SS-NVHF9-30K	HF9	9/16"x18UNF LH	1-1/8"x12UNF	3,175	0,125	RK-NV-30K	TU-HP9-60K
<b>4.140 bar / 60.000 psi</b>							
SS-NVHF4-60K	HF4	1/4"x28UNF LH	9/16"x18UNF	1,575	0,062	RK-NV-60K	TU-HP4-60K
SS-NVHF6-60K	HF6	3/8"x24UNF LH	3/4"-16UNF	1,575	0,062	RK-NV-60K	TU-HP6-60K
SS-NVHF9-60K	HF9	9/16"x18UNF LH	1-1/8"x12UNF	1,575	0,062	RK-NV-60K	TU-HP9-60K

Part Number	Unit	Dimensions												
		A	B	C	D1	D2	E	F	G	H	I	J	K	L
SS-NVHF4-30K	mm	50,80	25,40	50,80	38,10	28,45	9,65	35,05	76,20	120,40	-	7,11	14,99	25,40
	inch	2,00	1,00	2,00	1,50	1,12	0,38	1,38	3,00	4,74	-	0,28	0,59	1,00
SS-NVHF4-60K	mm	50,80	25,40	53,85	42,93	33,27	9,65	35,05	76,20	124,21	-	7,11	14,99	25,40
	inch	2,00	1,00	2,12	1,69	1,31	0,38	1,38	3,00	4,89	-	0,28	0,59	1,00
SS-NVHF6-30K	mm	50,80	25,40	50,80	38,10	28,45	9,65	35,05	76,20	120,40	-	7,11	18,29	25,40
	inch	2,00	1,00	2,00	1,50	1,12	0,38	1,38	3,00	4,74	-	0,28	0,72	1,00
SS-NVHF6-60K	mm	50,80	25,40	57,15	42,93	33,27	9,65	35,05	76,20	127,51	-	7,11	18,29	25,40
	inch	2,00	1,00	2,25	1,69	1,31	0,38	1,38	3,00	5,02	-	0,28	0,72	1,00
SS-NVHF9-30K	mm	66,55	33,27	62,00	39,62	28,45	9,65	35,05	76,20	131,60	-	7,11	25,40	38,10
	inch	2,62	1,31	2,44	1,56	1,12	0,38	1,38	3,00	5,18	-	0,28	1,00	1,50
SS-NVHF9-60K	mm	66,55	33,27	63,50	44,45	33,27	9,65	35,05	76,20	133,86	-	7,11	25,40	38,10
	inch	2,62	1,31	2,50	1,75	1,31	0,38	1,38	3,00	5,27	-	0,28	1,00	1,50