


Regardless of the industry, SPIR STAR® offers cross-industry solutions of various quick disconnect couplers. The range of couplers includes both plug-in couplers and screw-type couplers.

The portfolio also includes couplers with or without integrated check valves. The maximum possible working pressure is 2,070 bar / 30,000 psi.

SPC-QUICK DISCONNECT COUPLERS

Thread types:	High-Pressure, Medium-Pressure, Type-M, NPT and JIC
Max. working pressure:	2.070 bar 30.000 psi
Material:	316 stainless steel body
Bore size:	6 mm

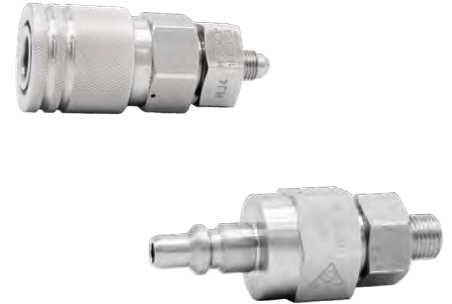

QRC-QUICK DISCONNECTORS

Thread types:	BSPF Female for 100° cone
Max. working pressure:	1.500 bar 21.750 psi
Material:	High tensile steel with anti-corrosion finish, NBR sealing
Temperature range:	-25°C to +100°C -10°F to 210°F
Visual check:	Safety ring



PUSH/PULL-QUICK DISCONNECTORS

Thread types:	NPT
Max. working pressure:	690 bar 10.000 psi
Material:	Steel




SCREW TYPE QUICK DISCONNECTS

Thread types:	Medium-Pressure, NPT
Max. working pressure:	1.380 bar 20.000 psi
Material:	Stainless steel



Type-M

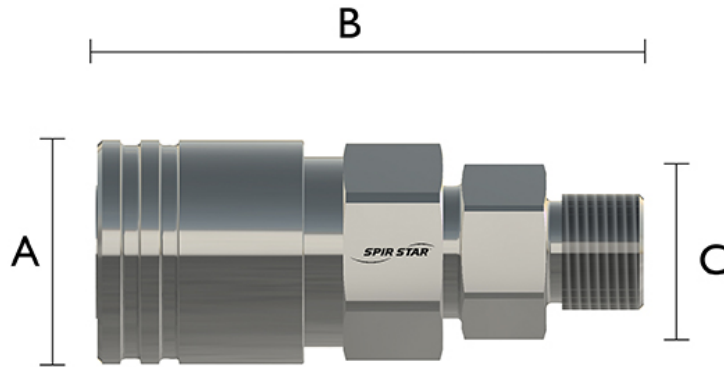

Part Number	Thread Description	Tube Thread	Screw-in Thread	Orifice		Repair Kit	Suitable Tubing
				mm	inch		
2.070 bar / 30.000 psi							
SPC600-0-M9	Type-M9		9/16"-18UNF	6,000	0,236		
SPC600-0-M12	Type-M12		3/4"-16UNF	6,000	0,236		
SPC600-0-M14	Type-M14		7/8"-14UNF	6,000	0,236		
SPC600-0-M16	Type-M16		1"-12UNF	6,000	0,236		

Part Number	Unit	Dimensions												
		A	B	C	D1	D2	E	F	G	H	I	J	K	L
SPC600-0-M9	mm	86,36	36,07	25,40	-	-	-	-	-	-	-	-	-	-
	inch	3,40	1,42	1,00	-	-	-	-	-	-	-	-	-	-
SPC600-0-M12	mm	90,42	36,83	25,40	-	-	-	-	-	-	-	-	-	-
	inch	3,56	1,45	1,00	-	-	-	-	-	-	-	-	-	-
SPC600-0-M14	mm	93,47	36,83	28,70	-	-	-	-	-	-	-	-	-	-
	inch	3,68	1,45	1,13	-	-	-	-	-	-	-	-	-	-
SPC600-0-M16	mm	90,68	36,83	25,40	-	-	-	-	-	-	-	-	-	-
	inch	3,57	1,45	1,00	-	-	-	-	-	-	-	-	-	-