Flex Lance Selection Guide

(All hoses and end fittings shown are actual size)

Duralife™ Outer Cover for Superior Abrasion Resistance
Blast-Pro® Compact End Fitting for Cleaning Efficiency

O.D. Size

0.36”

3/2 Duralife Flex™ (0.13” I.D.)
0.36” Maximum End Fitting O.D.
14,500 P.S.I. Working Pressure
End Fittings: 1/16” MNPT

0.39”

4/2 Duralife Flex™ (0.16” I.D.)
0.39” Maximum End Fitting O.D.
15,000 P.S.I. Working Pressure
End Fittings: 1/16” MNPT 1/16” FNPT 1/8” MNPT

0.47”

5/2 Duralife Flex™ (0.20” I.D.)
0.47” Maximum End Fitting O.D.
15,000 P.S.I. Working Pressure
End Fittings: 1/8” MNPT 1/8” FNPT

0.50”

5/3 Duralife Flex™ for Extreme Service (0.20” I.D.)
0.50” Maximum End Fitting O.D.
15,000 P.S.I. Working Pressure
End Fittings: 1/8” MNPT 1/8” FNPT

0.55”

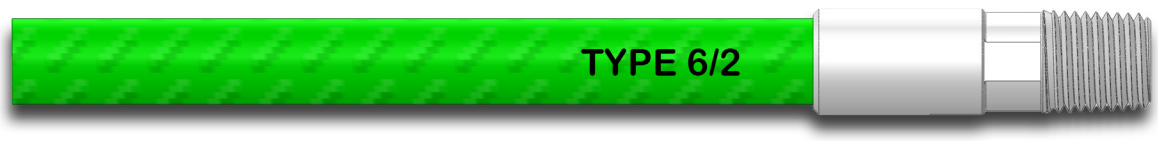

6/2 Duralife Flex™ (0.25” I.D.)
0.55” Maximum End Fitting O.D.
15,000 P.S.I. Working Pressure
End Fittings: 1/4” MNPT

0.60”

6/3 Duralife Flex™ for Extreme Service (0.25” I.D.)
0.60” Maximum End Fitting O.D.
15,000 P.S.I. Working Pressure
End Fittings: 1/4” MNPT

0.70”

8/2 Duralife Flex™ (0.32” I.D.)
0.70” Maximum End Fitting O.D.
12,000 P.S.I. Working Pressure
End Fittings: 3/8” MNPT

0.47”

3/4 Blast-Pro® (0.13” I.D.)
0.47” Maximum End Fitting O.D.
29,000 P.S.I. Working Pressure
End Fittings: 1/4” - 28 HP Male
Left Hand or Right Hand

0.39”

4/2H Blast-Pro® (0.16” I.D.)
0.39” Maximum End Fitting O.D.
20,000 P.S.I. Working Pressure
End Fittings: 1/4” - 28 MP Male
Left Hand or Right Hand

0.49”

4/4 Blast-Pro® (0.16” I.D.)
0.49” Maximum End Fitting O.D.
31,000 P.S.I. Working Pressure
End Fittings: 1/4” -28 HP / M or F
Left Hand or Right Hand

0.49”

5/4 Blast-Pro® (0.20” I.D.)
0.49” Maximum End Fitting O.D.
20,000 P.S.I. Working Pressure
End Fittings: 1/4” -28 OR 3/8” - 24 MP / M or F
Left Hand or Right Hand

0.57”

6/4 Blast-Pro® (0.25” I.D.)
0.57” Maximum End Fitting O.D.
20,000 P.S.I. Working Pressure
End Fittings: 3/8” - 24 MP / M or F
Left Hand or Right Hand

0.67”

8/4 Blast-Pro® (0.32” I.D.)
0.67” Maximum End Fitting O.D.
20,000 P.S.I. Working Pressure
End Fittings: 9/16” - 18 MP / M or F
Left Hand or Right Hand

0.50”

3/6 Blast-Pro® (0.12” I.D.)
0.50” Maximum End Fitting O.D.
40,000 P.S.I. Working Pressure
End Fittings: 1/4” -28 OR 3/8” - 24 HP Male
Left Hand or Right Hand

0.475”

4/4 UHP-X Blast-Pro® (0.16” I.D.)
0.475” Maximum End Fitting O.D.
44,000 P.S.I. Working Pressure
End Fittings: 1/4” -28 OR 3/8” - 24 HP Male
Left Hand or Right Hand

10002 Sam Houston Center Drive * Houston, TX 77064
(800) 890 - 7827 * PH: (281) 664 - 7800 * FAX: (281) 664 - 7850
www.spirstar.com

© 2022 SPIR STAR

ISO 9001 CERTIFICATION Certificate No. 5946
ISO 45001 CERTIFICATION Certificate No. OH 1389