


SPIR STAR

NEW

10mm Hydrogen

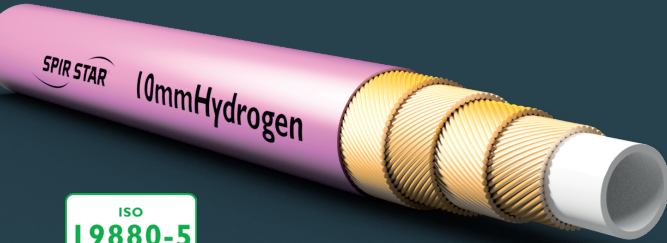

Temperature -40°C to +65°C

Max. Working Pressure 962.5 bar


Bend Radius 180 mm

 Weight 0.640 kg/m

 ID 9.9 mm

 OD 18.6 mm

TRAILER FILLING




FILLING STATIONS



HYDROGEN

NEW

10mm Hydrogen

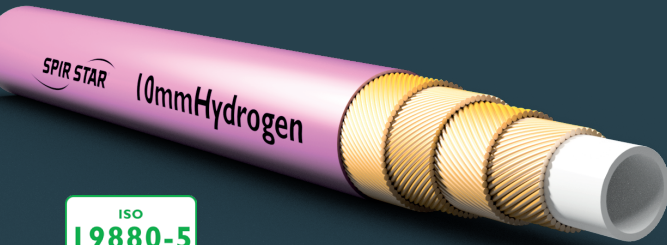

Low permeation rate



Multiple fittings available



Suitable for H70 (700 bar) High Flow application up to 300g/second



Great handling:
small bend radius, low weight



3x faster refueling with same pressure drop*

* compared to current hose lines with smaller diameters

DATA SHEET

